


TecSOMTM



HiLL VieW : 5500

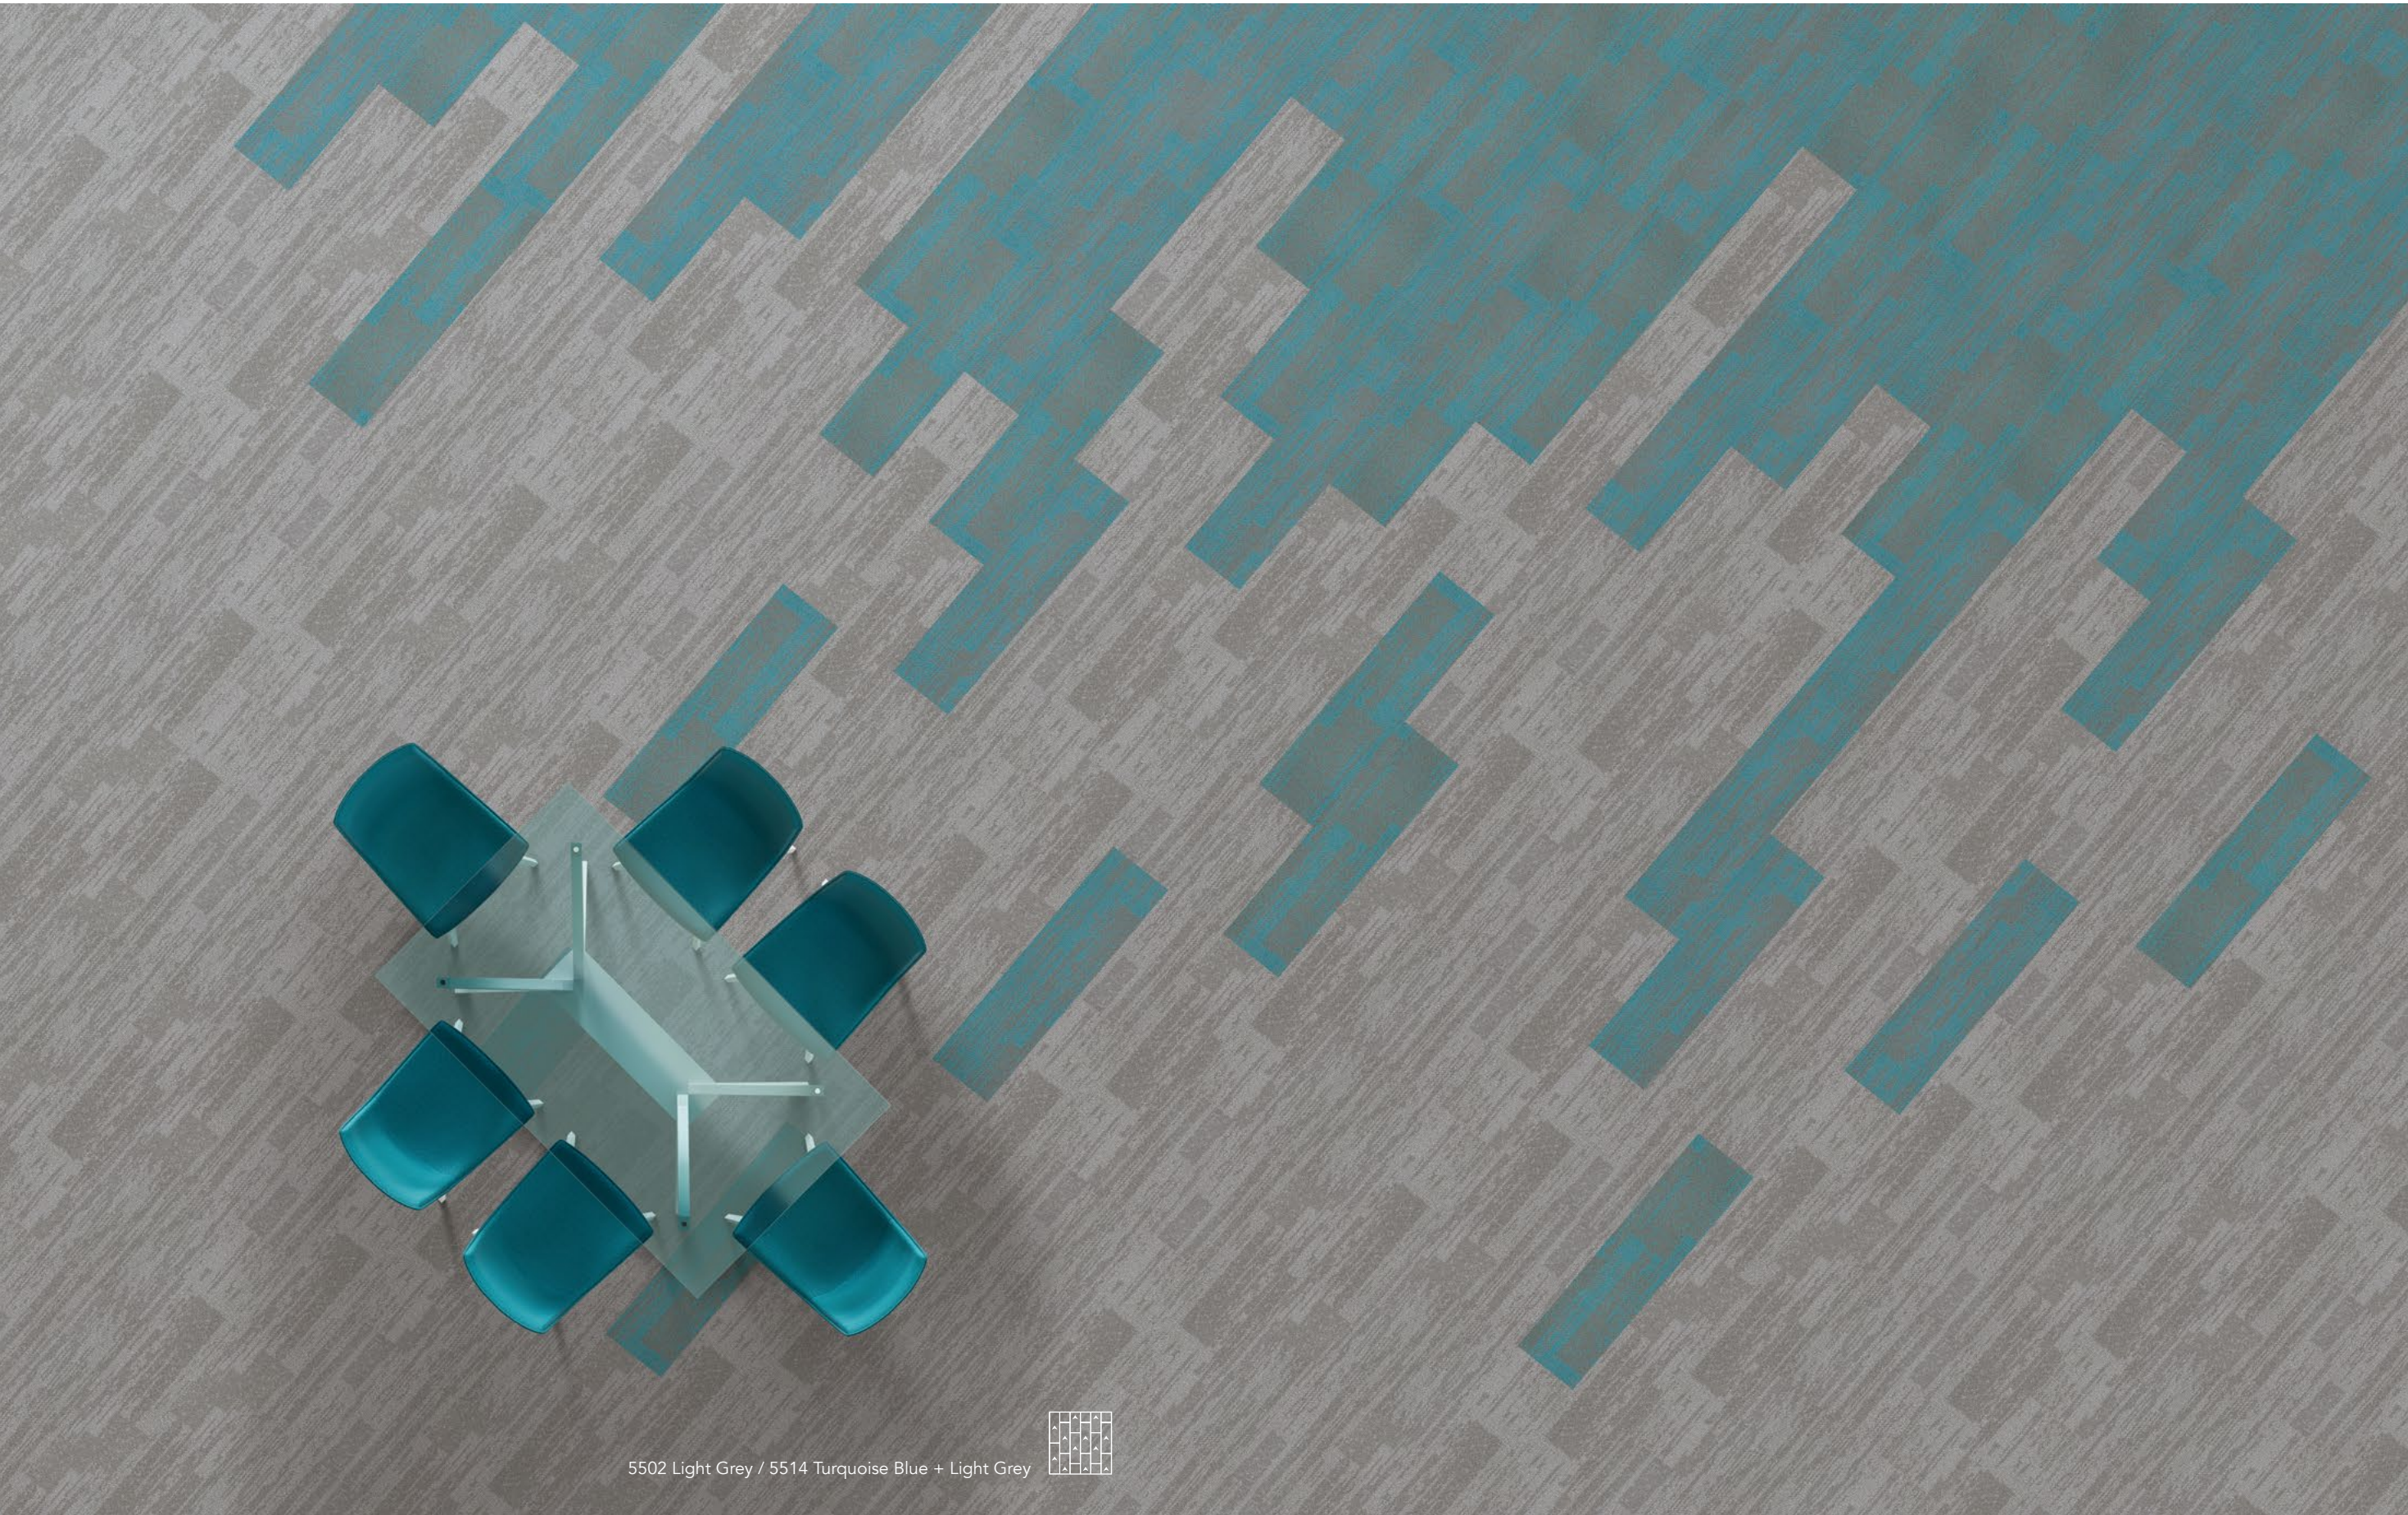

5502 Light Grey / 5514 Turquoise Blue + Light Grey





5502 Light Grey



5502 Light Grey / 5513 Orange + Light Grey



5504 Dark Grey / 5515 Green + Dark Grey





5505 Yellow + Light Grey / 5513 Orange + Light Grey / 5514 Turquoise Blue + Light Grey



5502 Light Grey / 5504 Dark Grey / 5505 Yellow + Light Grey





5504 Dark Grey / 5507 Red + Dark Grey / 5512 Royal Blue + Dark Grey



5504 Dark Grey / 5507 Red + Dark Grey






HiLL VieW : 5500




5502 Light Grey



5504 Dark Grey

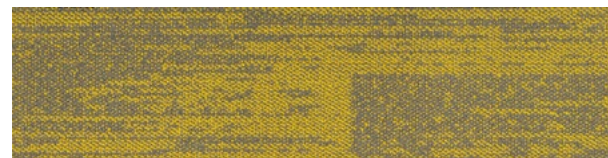


5505 Yellow + Light Grey

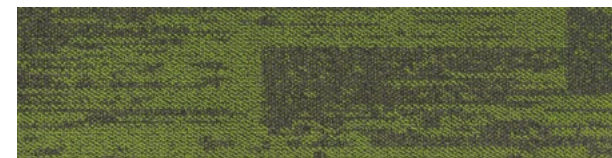

5515 Green + Dark Grey



5513 Orange + Light Grey

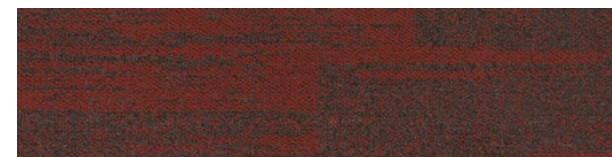

5507 Red + Dark Grey




5514 Turquoise Blue + Light Grey



5512 Royal Blue + Dark Grey

Style Name:	HiLL VieW : 5500
Construction:	Multi-level loop
Yarn:	100% Polypropylene
Color System:	100% Solution Dyed
Gauge:	1/12
Stitches:	9.5 per inch
Pile Weight:	660 ±10g/m2 (20 onz)
Pile Height:	2.5-4.5mm (±0.5mm)
Backing:	E back
Tile Size:	25cm×100cm
Area of Use:	Commercial
VOC:	Pass ASTMDF06-11
Flammability:	Pass CPSC FF1-70 Pass 16 CFR 1630 Pass ASTM D 2859-96 Pass Consumer Product Safety improvement Act
Static Generation:	Pass AATCC 134-2011 Pass ASTM C-1028
Flaming radiant panel test:	Pass ASTM E 648-17 Pass 372 NFPA253
Smoke Density:	Pass 708 & NFPA258 Pass ASTM E662-15a
Stain Resistance:	Pass AATCC 175-2003
Dimension Stability:	Pass AACHEN / ISO 2551
Accelerated Soiling:	Pass ASTM D 6540
Colorfastness to Light:	Pass AATCC Test Method 16.3
Colorfastness to Crocking:	Pass AATCC Test Method 165

INSTALLATION METHODS



Herringbone



Ashlar



Monolithic



Brick

5502 Light Grey / 5514 Turquoise Blue + Light Grey

