

RIIL

Product Name	Riil 15800
Construction	Multi-level Loop
Material	100% Nylon 6
Color System	100% Solution Dyed
Machine Gauge	1 / 12 "
Pile Height	2.5 - 4.5 mm
Tile Size	25 x 100 cm
Soil/Stain Protection	RSG Protection
Backing Structure	EcoGen®



Performance Specifications

Stability - Delaminating

ISO 2551
AS/NZS 2111.16
ASTM D3936

Stability - Dimensional Stability

ISO 2551
ISO/PAS 17984

Stability - Tuft Bind

ASTM D1335
ISO 4919
AS/NZS 2111.15

Flammability - Methanamine Pill

BS 6307
ISO 6925

Flammability - Radiant Panel

ISO 9239-1
ASTM E648

Flammability - Smoke Density

ISO 9239-1
ASTM E662

Antimicrobial Treatment

ASTM E2471
AATCC 174
AATCC 171

Colour Fastness - Light

AS 2001
ISO 105-B02
AATCC 16E

Colour Fastness - Rubbing and Crocking

ISO 105-X12
AS/NZS 2111.19.1
AATCC 165

Colour Fastness - Water

AS 2001.4.21
ISO 105-E01
AATCC 107

Wear - Castor Chair

BS-EN 985
ISO 4918

Wear - Vetterman Drum

BS ISO 10361

Sound Absorption

ISO 354

Impact Sound

ISO 10140-3

Antistatic

BS ISO 6356
AATCC 134

Generic Tests

Dynamic Loading

ISO 2094
AS/NZS 2111.2

Green Carpet (VOC)

ISO 10580
ASTM D7706-11

Green Carpet (Formaldehyde)

NIOSH Method 2016

Static Loading


ISO 015/3415
AS/NZS 2111.13

Thermal Resistance


ASTM C518 R

Static Generation

AATCC 134



Ashlar



Herringbone



Ultraviolet resistance



Anti-Static



Reduced flammability



Wear resistance



Environmental



Long life-span



Dimensional stability



Anti-slip



Passed Various Tests

- This carpet is manufactured and sold for floorcovering use only.
- As with all carpets, colors are subject to dye lot variations.
- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice.

For more information welcome to browse our website: www.rsgflooring.com

RIIL




RIIL

15800



15801

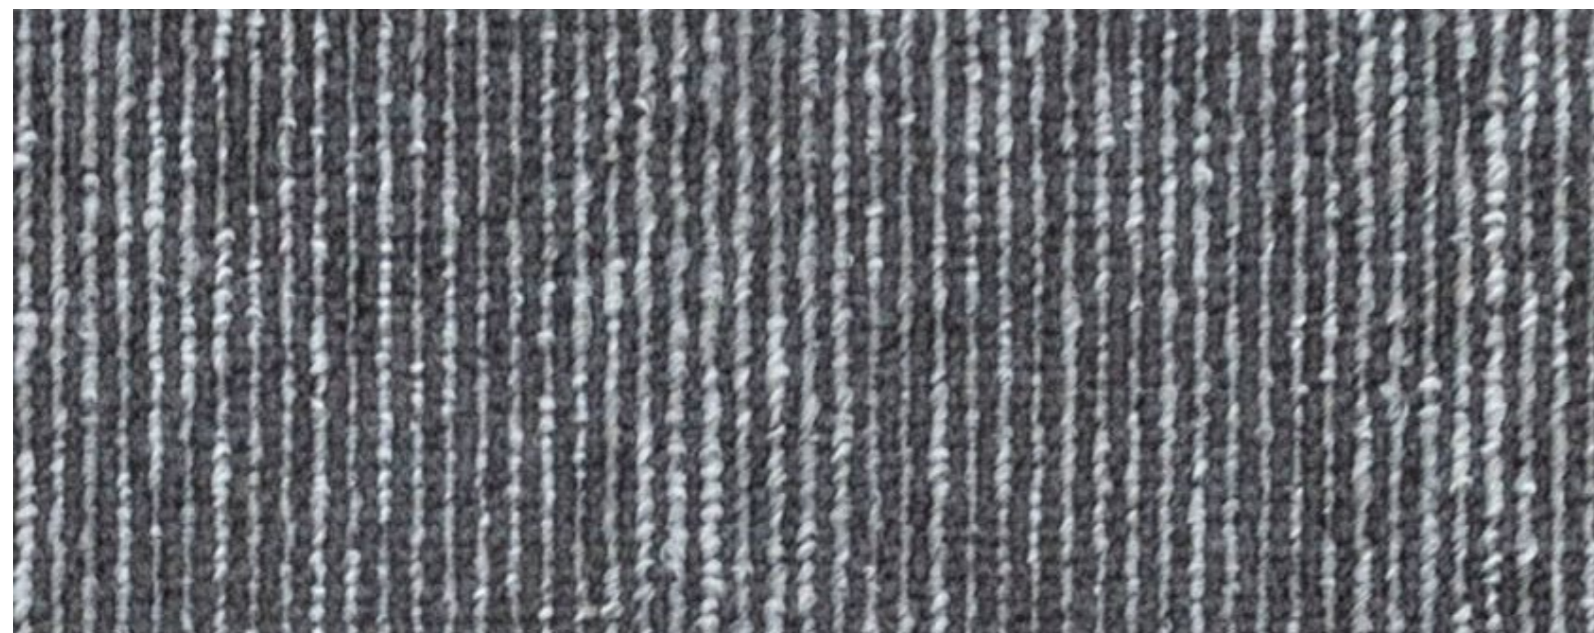

15802




15803

RIIL




15804

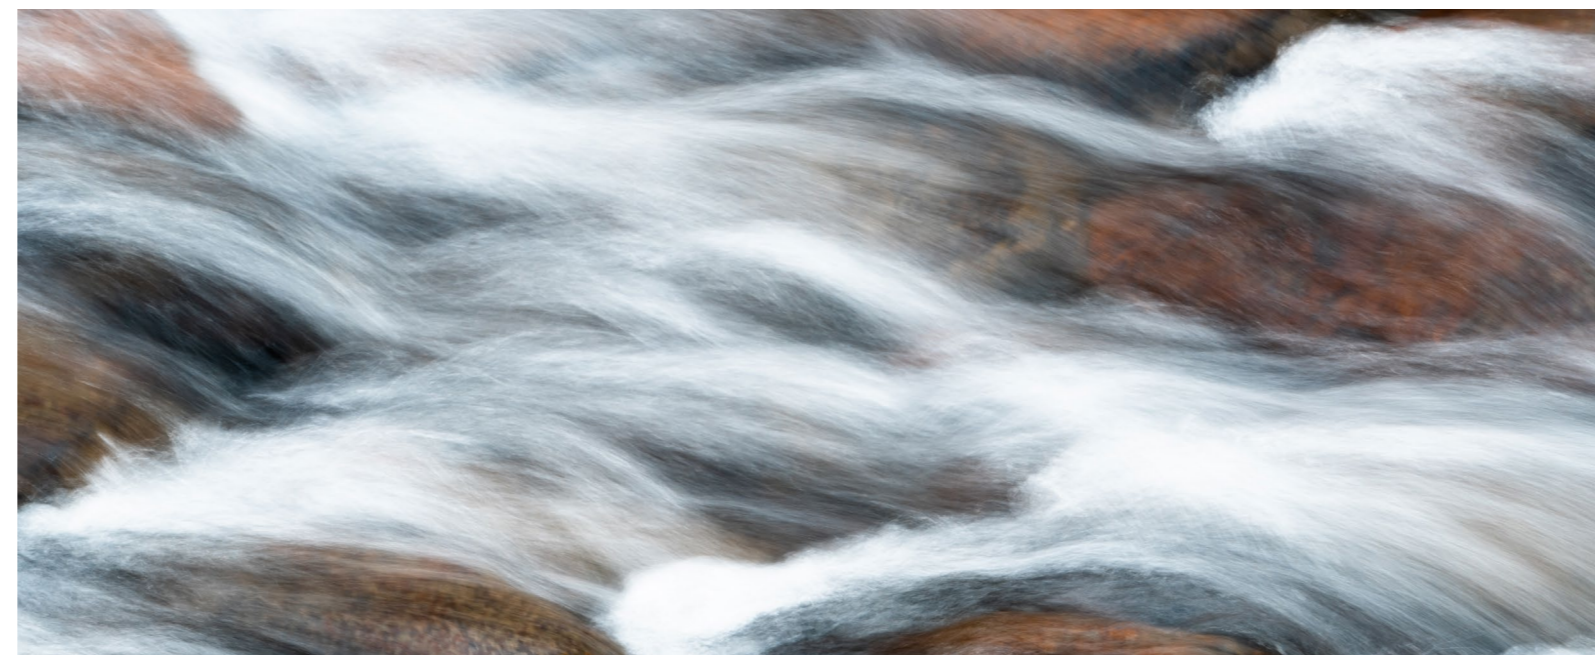

15805

RSG
CONTRACT

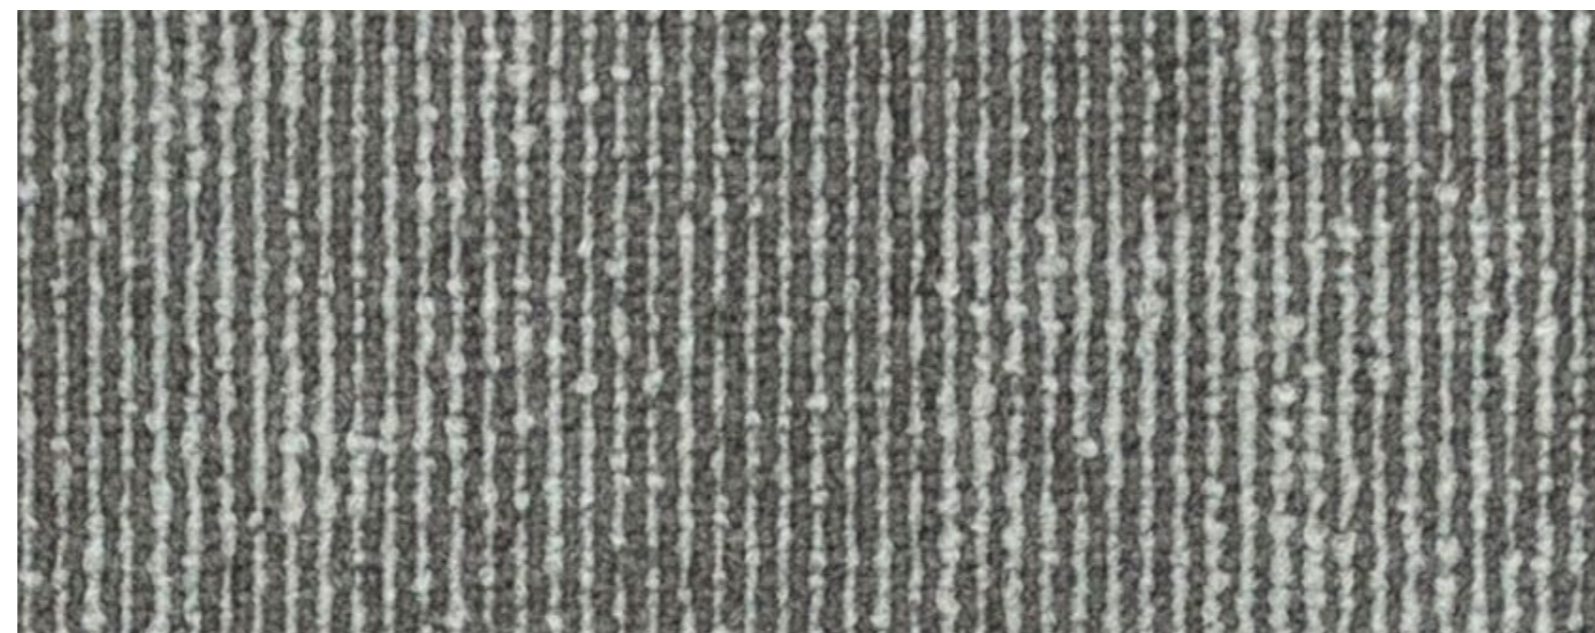

15806



15807



15808



RSG
CONTRACT

RIIL



The **RILL** flows slowly,
but eternity remains.





15804+06



15801+03+08



15805+06+07







ALWAYS READ
SOMETHING THAT
WILL MAKE YOU
LOOK GOOD
OF YOU DER
IN THE
MIDDLE OG IT



RILL



Product Name	: Rill 15800
Construction	: Multi-Level loop
Material	: 100% Nylon 6
Color System	: 100% Solution Dyed
Machine Gauge	: 1 / 12 "
Pile Height	: 2.5 - 4.5 mm
Tile Size	: 25 x 100 cm
Soil/Stain Protection	: RSG Protection
Backing Structure	: EcoGen®

Generic Tests

Dynamic Loading Pass ISO 2094 Pass AS/NZS 2111.2	Green Carpet (VOC) Pass ISO 10580 Pass ASTM D7706-11
Static Loading Pass ISO 015/3415 Pass AS/NZS 2111.13	Green Carpet (Formaldehyde) Pass NIOSH Method 2016
Thermal Resistance Pass ASTM C518 R	Static Generation Pass AATCC 134

Performance Specifications

Stability - Delaminating Pass ISO 2551 Pass AS/NZS 2111.16 Pass ASTM D3936	Colour Fastness - Light Pass AS 2001 Pass ISO 105-B02 Pass AATCC 16E
Stability - Dimensional Pass ISO 2551 Pass ISO/PAS 17984	Colour Fastness - Rubbing and Crocking Pass ISO 105-X12 Pass AS/NZS 2111.19.1 Pass AATCC 165
Stability - Tuft Bind Pass ASTM D1335 Pass ISO 4919 Pass AS/NZS 2111.15	Colour Fastness - Water Pass AS 2001.4.21 Pass ISO 105-E01 Pass AATCC 107
Flammability - Methanamine Pill Pass BS 6307 Pass ISO 6925	Wear - Castor Chair Pass BS-EN 985 Pass ISO 4918
Flammability - Radiant Panel Pass ISO 9239-1 Pass ASTM E648	Wear - Vetterman Drum Pass BS ISO 10361
Flammability - Smoke Density Pass ISO 9239-1 Pass ASTM E662	Sound Absorption Pass ISO 354
Antistatic Pass BS ISO 6356 Pass AATCC 134	Impact Sound Pass ISO 10140-3
	Antimicrobial Treatment Pass ASTM E2471 Pass AATCC 174 Pass AATCC 171

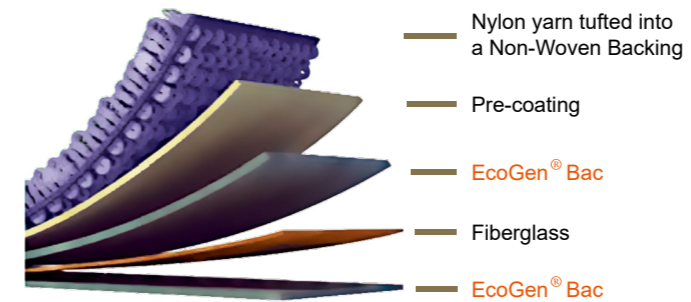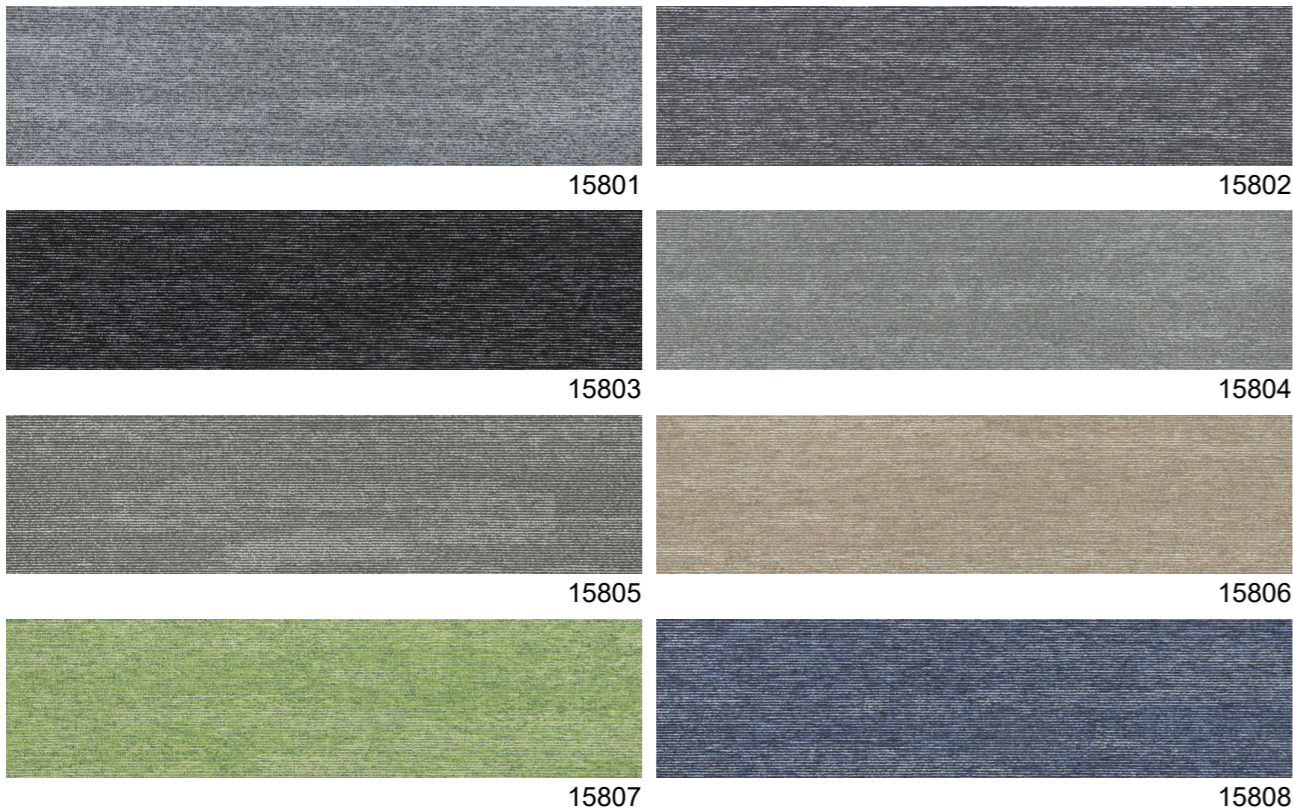

EcoGen® BAC

A minimum of **35% overall recycled content**.
Standard for all RSG Contact Modular product designs. And we only use **Hexamoll DINCH** as plasticizers.



Hexamoll DINCH

- Ideal solution for **non-phthalate** plasticizers.
- Especially designed for applications with **close human contacts**.
- Used extensively for **medical, food contact & toys** application.

