



RSG[®]
CONTRACT

CANYON



When granite and sandstone begin to blur and flow,
the eye rests on cool white aspen.
Strange, their seeming transparency.
How as in a sudden flash one remembers a forgotten name, so the recollection. Aspen.
With a breeze in them, their quiet rhythms,
shimmering, quaking. Powder on the palm.
Cool on the cheek.
Such delicacy the brittle wood,
limbs snapping at a grasp, whole trees tumbling in the winds.
Sweet scent on a swollen afternoon.
Autumn, leaves falling one upon another, gold rains upon a golden earth.
How at evening when the forest darkens, aspen do not.
And a white moon rises and silver stars point toward the mountain,
darkness holds them so pale.
They stand still, very still.











16103



16104










16101



16101

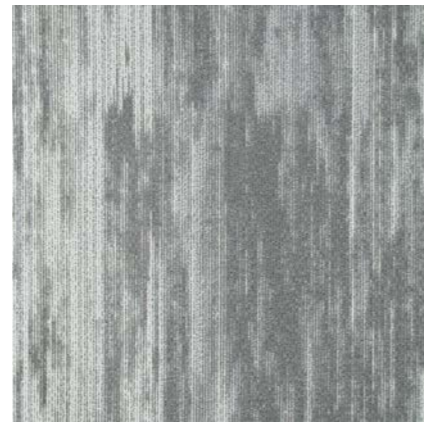

16102




16103




16104




16105

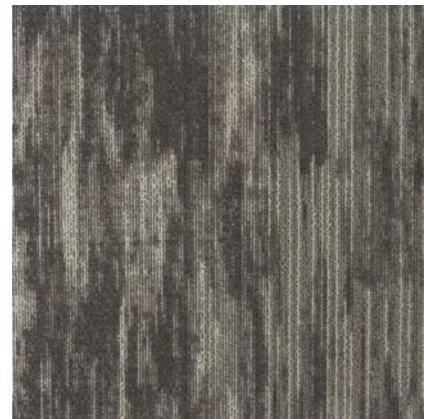

16106

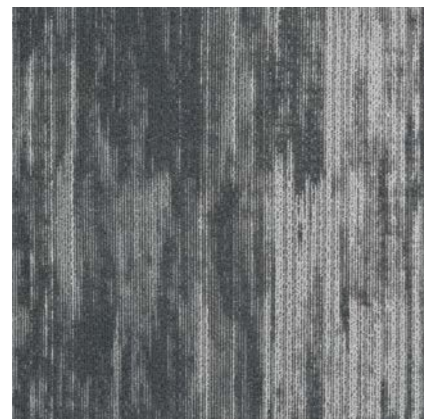

16107

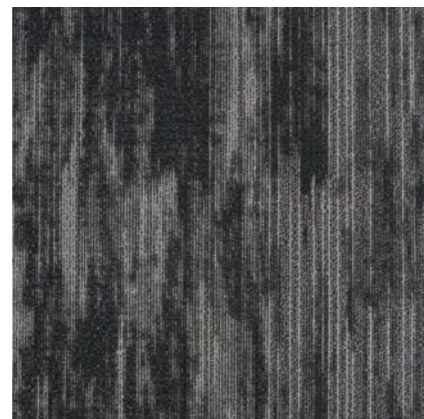

16108

CANYON

Product Name : Canyon 16100
Construction : Multi-level Loop
Material : 100% Nylon 6
Color System : 100% Solution Dyed
Machine Gauge : 1 / 12 "
Pile Height : 3.0 ~ 5.0 mm
Tile Size : 24 x 24 "
Soil/Stain Protection : RSG Protection
Backing Structure : EcoGen®

Generic Tests

Dynamic Loading
 Pass ISO 2094
 Pass AS/NZS 2111.2


Static Loading
 Pass ISO 015/3415
 Pass AS/NZS 2111.13

Thermal Resistance
 Pass ASTM C518 R

Green Carpet(VOC)
 Pass ISO 10580
 Pass ASTM D7706-11

Green Carpet (Formaldehyde)
 Pass NIOSH Method 2016

Static Generation
 Pass AATCC 134

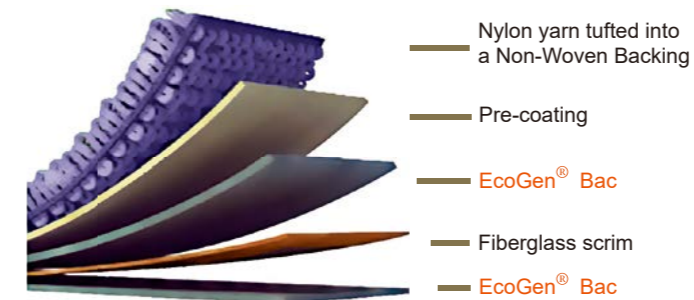

EcoGen® BAC

A minimum of 35% overall recycled content.

Standard for all RSG Contact Modular product designs. And we only use Hexamoll DINCH as plasticizers.



Performance Specifications

Stability - Delaminating
 Pass ISO 2551
 Pass AS/NZS 2111.16
 Pass ASTM D3936

Stability - Dimensional
 Pass ISO 2551
 Pass ISO/PAS 17984

Stability - Tuft Bind
 Pass ASTM D1335
 Pass ISO 4919
 Pass AS/NZS 2111.15

Flammability - Methanamine Pill
 Pass BS 6307
 Pass ISO 6925

Flammability - Radiant Panel
 Pass ISO 9239-1
 Pass ASTM E648

Flammability - Smoke Density
 Pass ISO 9239-1
 Pass ASTM E662

Antistatic
 Pass BS ISO 6356
 Pass AATCC 134

Colour Fastness - Light
 Pass AS 2001
 Pass ISO 105-B02
 Pass AATCC 16E

Colour Fastness - Rubbing and Crocking
 Pass ISO 105-X12
 Pass AS/NZS 2111.19.1
 Pass AATCC 165

Colour Fastness - Water
 Pass AS 2001.4.21
 Pass ISO 105-E01
 Pass AATCC 107

Wear - Castor Chair
 Pass BS-EN 985
 Pass ISO 4918

Wear - Vetterman Drum
 Pass BS ISO 10361

Sound Absorption
 Pass ISO 354

Impact Sound
 Pass ISO 10140-3

Antimicrobial Treatment
 Pass ASTM E2471
 Pass AATCC 174
 Pass AATCC 171

Hexamoll DINCH

- Ideal solution for non-phthalate plasticizers.
- Especially designed for applications with close human contacts.
- Used extensively for medical, food contact & toys application.

