



RSG[®]
CONTRACT

ROCK




















ROCK

Product Name : Rock 16200
Construction : Multi-level Loop
Material : 100% Nylon 6
Color System : 100% Solution Dyed
Machine Gauge : 1 / 12 "
Pile Height : 3.0 ~ 5.5 mm
Tile Size : 25 x 100 cm
Soil/Stain Protection : RSG Protection
Backing Structure : PVC with fiberglass

Generic Tests

Dynamic Loading Pass ISO 2094 Pass AS/NZS 2111.2	Green Carpet(VOC) Pass ISO 10580 Pass ASTM D7706-11
Static Loading Pass ISO 015/3415 Pass AS/NZS 2111.13	Green Carpet (Formaldehyde) Pass NIOSH Method 2016
Thermal Resistance Pass ASTM C518 R	Static Generation Pass AATCC 134


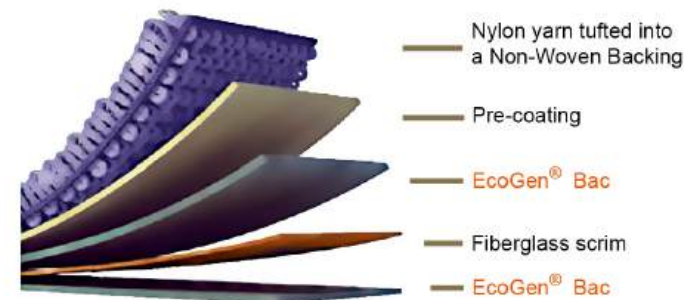


Performance Specifications

Stability - Delaminating Pass ISO 2551 Pass AS/NZS 2111.16 Pass ASTM D3936	Colour Fastness - Light Pass AS 2001 Pass ISO 105-B02 Pass AATCC 16E
Stability - Dimensional Pass ISO 2551 Pass ISO/PAS 17984	Colour Fastness - Rubbing and Crocking Pass ISO 105-X12 Pass AS/NZS 2111.19.1 Pass AATCC 165
Stability - Tuft Bind Pass ASTM D1335 Pass ISO 4919 Pass AS/NZS 2111.15	Colour Fastness - Water Pass AS 2001.4.21 Pass ISO 105-E01 Pass AATCC 107
Flammability - Methanamine Pill Pass BS 6307 Pass ISO 6925	Wear - Castor Chair Pass BS-EN 985 Pass ISO 4918
Flammability - Radiant Panel Pass ISO 9239-1 Pass ASTM E648	Wear - Vetterman Drum Pass BS ISO 10361
Flammability - Smoke Density Pass ISO 9239-1 Pass ASTM E662	Sound Absorption Pass ISO 354
Antistatic Pass BS ISO 6356 Pass AATCC 134	Impact Sound Pass ISO 10140-3
	Antimicrobial Treatment Pass ASTM E2471 Pass AATCC 174 Pass AATCC 171

Hexamoll DINCH

- Ideal solution for non-phthalate plasticizers.
- Especially designed for applications with close human contacts.
- Used extensively for medical, food contact & toys application.

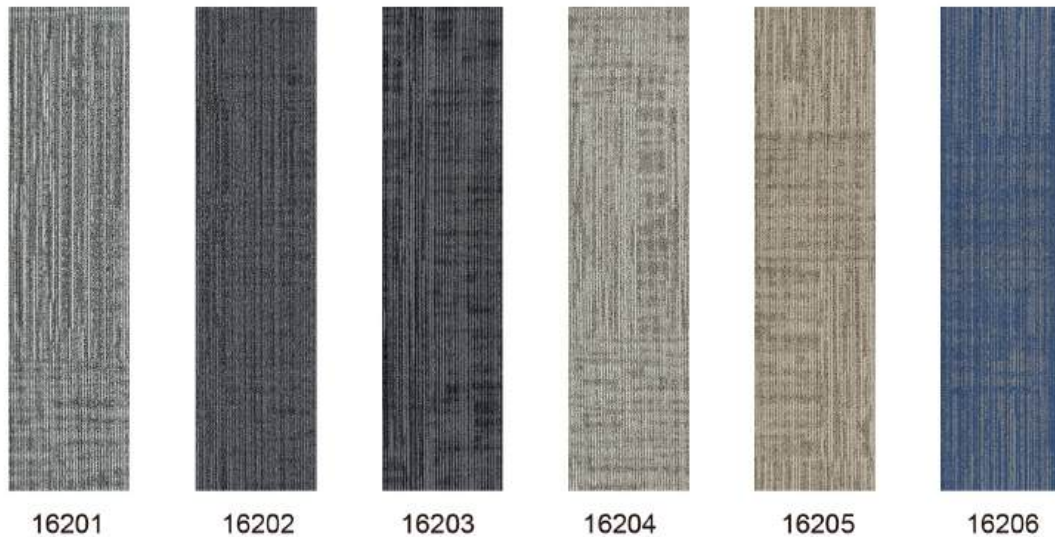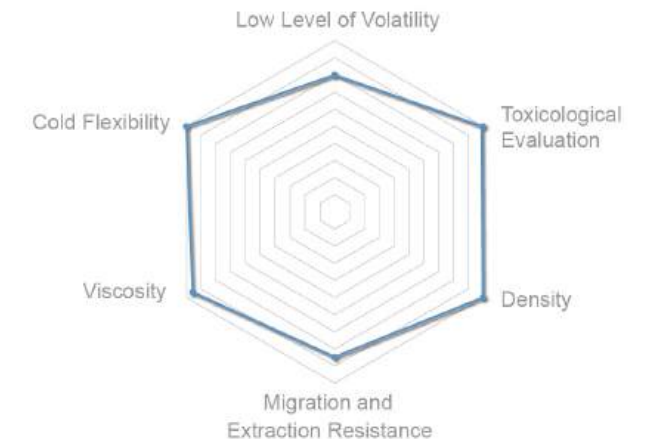

EcoGen® BAC

A minimum of 35% overall recycled content.

Standard for all RSG Contact Modular product designs. And we only use Hexamoll DINCH as plasticizers.

