



RSG[®]
CONTRACT

WISH

Life doesn't always give us the joys we want.
We don't always get our hopes and dreams,
and we don't always get our own way.
But don't give up hope,
because you can make a difference one situation and one person at a time.
Look for the beauty around you--in nature,
in others, in yourself--and believe in the love of friends, family, and humankind.
You can find love in a smile or a helping hand,
in a thoughtful gesture or a kind word.
It is all around, if you just look for it.
Give love, for in giving it you will find the power in life along with the joy,
happiness, patience, and understanding.









25801A, 25801B, 25806A & 25806B












25802A, 25802B, 25803A, 25803B, 25806A & 25806B



WISH

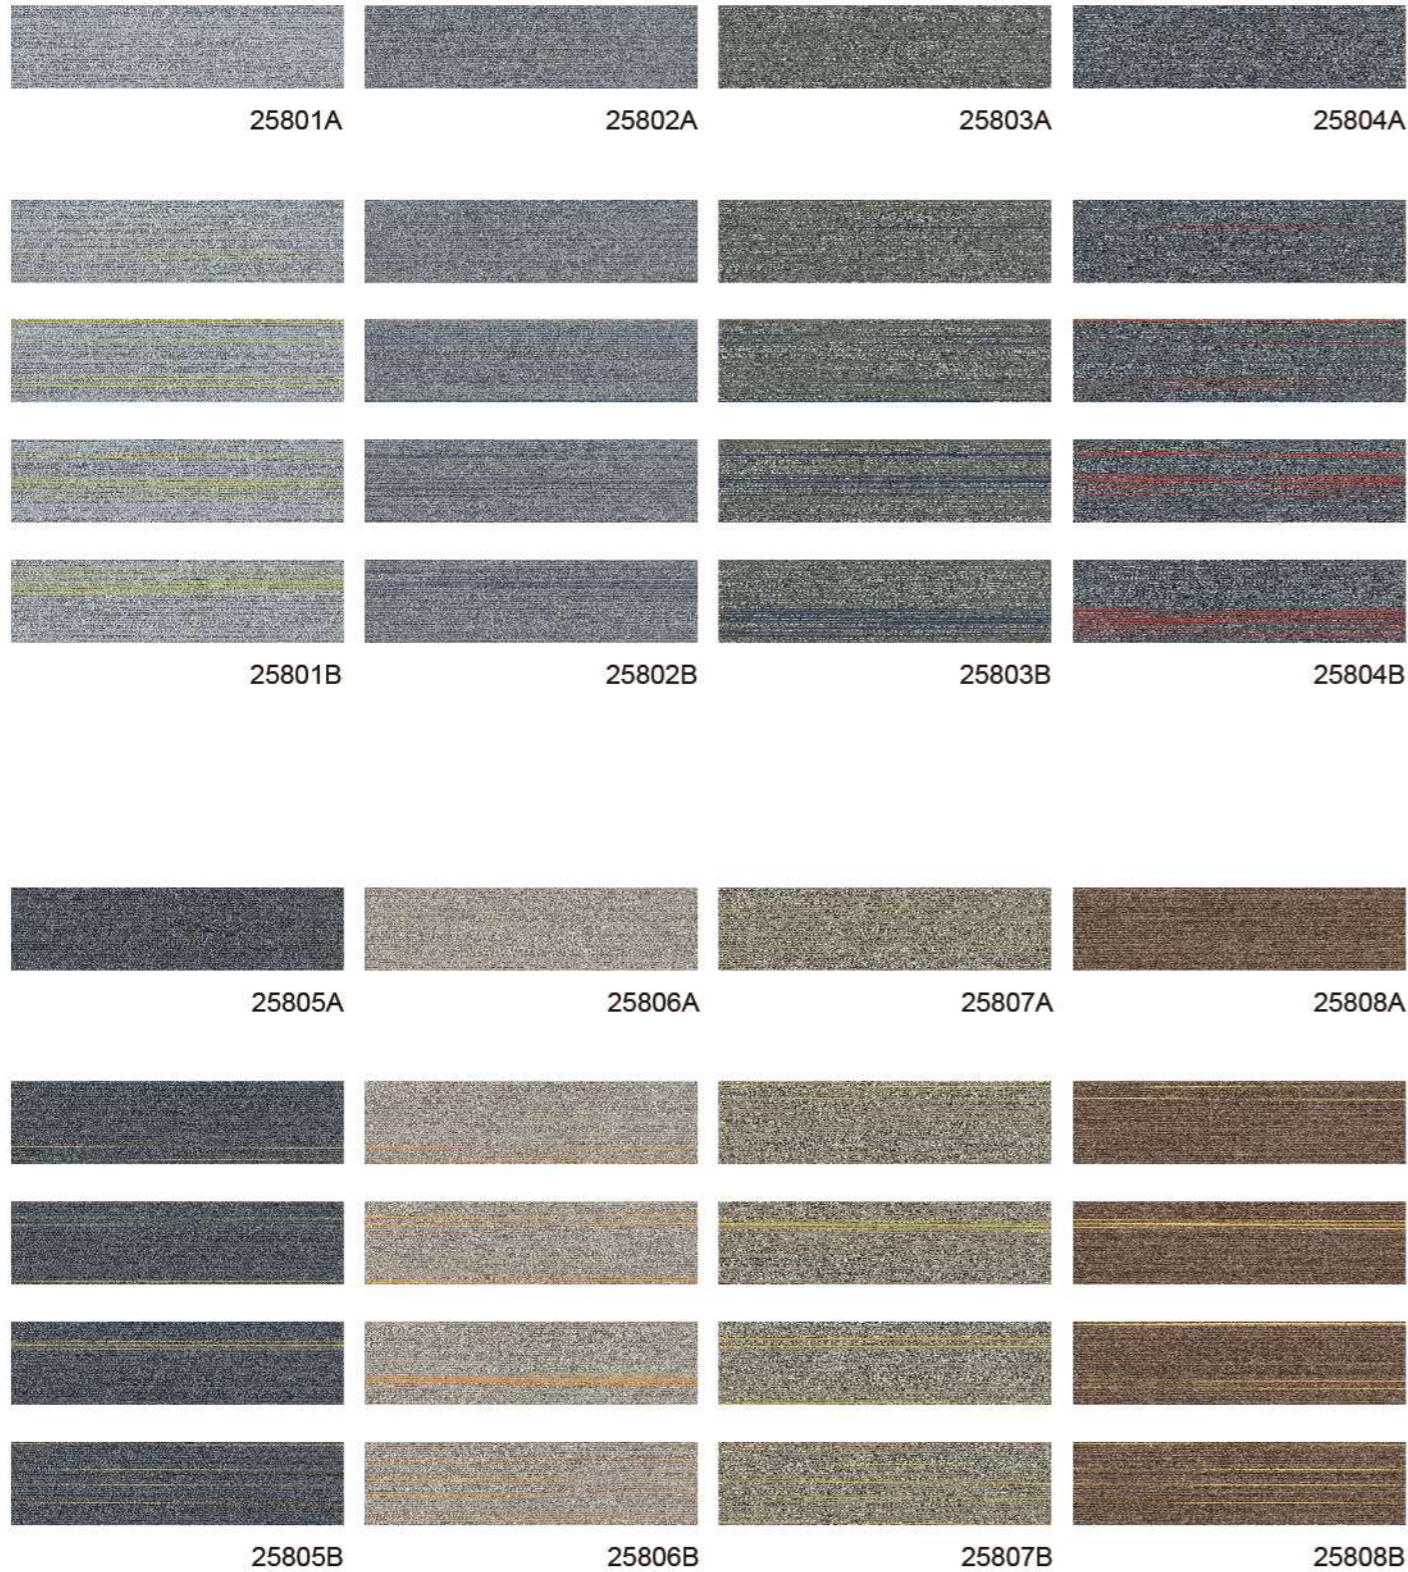


Product Name : Wish 25800
Construction : Level Loop
Material : 100% Nylon 6
Color System : 100% Solution Dyed
Machine Gauge : 1 / 10 "
Pile Height : 3.0 ± 0.5 mm
Tile Size : 25 x 100 cm
Soil/Stain Protection : RSG Protection
Backing Structure : EcoGen®

Performance Specifications

| | |
|--|--|
| Stability - Delaminating Pass ISO 2551 Pass AS/NZS 2111.16 Pass ASTM D3936 | Colour Fastness - Light Pass AS 2001 Pass ISO 105-B02 Pass AATCC 16E |
| Stability - Dimensional Pass ISO 2551 Pass ISO/PAS 17984 | Colour Fastness - Rubbing and Crocking Pass ISO 105-X12 Pass AS/NZS 2111.19.1 Pass AATCC 165 |
| Stability - Tuft Bind Pass ASTM D1335 Pass ISO 4919 Pass AS/NZS 2111.15 | Colour Fastness - Water Pass AS 2001.4.21 Pass ISO 105-E01 Pass AATCC 107 |
| Flammability - Methanamine Pill Pass BS 6307 Pass ISO 6925 | Wear - Castor Chair Pass BS-EN 985 Pass ISO 4918 |
| Flammability - Radiant Panel Pass ISO 9239-1 Pass ASTM E648 | Wear - Vetterman Drum Pass BS ISO 10361 |
| Flammability - Smoke Density Pass ISO 9239-1 Pass ASTM E662 | Sound Absorption Pass ISO 354 |
| Antistatic Pass BS ISO 6356 Pass AATCC 134 | Impact Sound Pass ISO 10140-3 |
| | Antimicrobial Treatment Pass ASTM E2471 Pass AATCC 174 Pass AATCC 171 |

Generic Tests

| | |
|---|--|
| Dynamic Loading Pass ISO 2094 Pass AS/NZS 2111.2 | Green Carpet(VOC) Pass ISO 10580 Pass ASTM D7706-11 |
| Static Loading Pass ISO 015/3415 Pass AS/NZS 2111.13 | Green Carpet (Formaldehyde) Pass NIOSH Method 2016 |
| Thermal Resistance Pass ASTM C518 R | Static Generation Pass AATCC 134 |

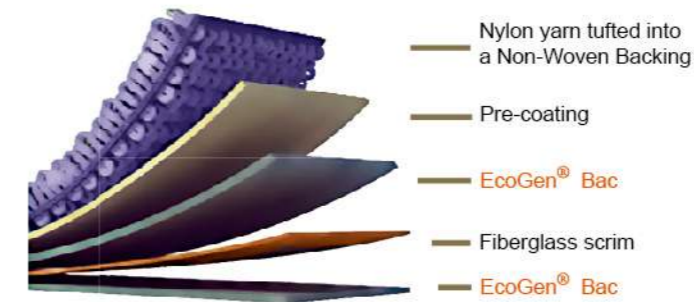

EcoGen® BAC

A minimum of 35% overall recycled content.

Standard for all RSG Contact Modular product designs. And we only use Hexamoll DINCH as plasticizers.

Hexamoll DINCH

- Ideal solution for non-phthalate plasticizers.
- Especially designed for applications with close human contacts.
- Used extensively for medical, food contact & toys application.

